CHAIN DISK FEED DELIVERY

AUTOMATED PRODUCTION SYSTEMS



eed de adapt and

Chain Disk feed delivery systems have the flexibility to adapt to all types of swine production facilities and the ability to overcome the performance and reliability constraints of other systems.



FLEXIBLE DESIGN

Chain Disk is ideally suited to delivering feed to multiple farrowing rooms, individual sow

stalls, electronic sow feed systems and the high volume demands of large finishing facilities.



GENTLE ON FEED

The gentle conveying method limits damage to expensive pelleted rations and prevents particle

separation in ground feed rations.



QUALITY COMPONENTS

Chain Disk's rugged design, quality components and unique control system enable it to outperform the

competition in capacity, distance and durability.



CHAIN DISK FEED DELIVERY

AUTOMATED PRODUCTION SYSTEMS






HEAVY-DUTY DRIVE UNITS

Chain Disk drive units are constructed of corrosion resistant 304 stainless steel and feature heavy duty, high efficiency, helical bevel gearboxes. High efficiency means more torque with less horsepower decreasing operating cost without sacrificing performance.







AUTO TENSIONING 🔺

Chain Disk drive units feature an automatic chain tensioning system to reduce maintenance and a safety shut off switch to shut down the system if

the system if it becomes plugged by a foreign object.



CLEAR CORNER HOUSINGS

Clear corner housings provide visual confirmation the system is operating properly at all times. The patent pending pivoting wiper insures that feed

does not accumulate in the center of the corner housing. Special corner units are available for inclined or vertical installation.



* Patent Pending



CHAIN DISK TUBING

Chain Disk is available with three styles of conveyor tubes to meet the requirements of every application.

- PVC Tube Corrosion free and quick and easy to install, ideal for farrowing and other low volume applications
- Ribbed Steel Tube Wear resistance of steel combined with the convenience of pre-punched holes
- Welded Steel Tube Ideal for high volume applications like finishing and electronic sow feeding.

Chain Disk Tube	Fill System	Daily Run Time	Effective Capacity*	Max. System Length** (w/ 8 corners)
PVC Tube	M300 Flex-Flo 250 RPM	Up to 100 min/day	Up to 35 lbs (16 kg)/min.	1,500 ft. (460 m)
Ribbed Steel Tube	M300 Flex-Flo 250 RPM	Up to 240 min/day	Up to 35 lbs (16 kg)/min.	1,500 ft. (460 m)
Welded Steel Tube	M300 Flex-Flo 250 RPM	Up to 240 min/day	Up to 35 lbs (16 kg)/min.	1,800 ft. (550 m)
	M300 Flex-Flo 358 RPM	Up to 240 min/day	Up to 50 lbs (23 kg)/min.	1,800 ft. (550 m)

* Effective capacity will decrease as system length increases, effective capacity at maximum length is reduced by approximately 40%

** Maximum system length will decrease by 25 ft. (8 M) for each additional corner that is added, up twenty-four corners can be used.

QUALITY CHAIN

Durable, low friction nylon disks injection molded onto hardened steel chain provide years of trouble free service eliminating the maintenance and down time associated with cable style conveyors.



TUBE SENSOR

A tube mounted sensor will shut down the system when feed returns to the inlet hopper indicating that all feeders have been filled. Chain Disk's sensor design eliminates the challenges caused by empty farrowing or nursery rooms and eliminates the task of correctly position sows in your breeding and gestation facilities to keep the feed system operating correctly.

Ribbed Steel

Tube



CHAIN DISK CONTROLLER

The Chain Disk Controller enables the feeding system to be programmed to operate how and when you want and constantly monitors the system to insure proper operation. Drive unit motor current is constantly monitored to insure that the system is not over loaded. When amp draw spikes, the Flex-Flo fill system is temporarily shut down by the controller until the drive unit motor amp draw decreases and normal operation resumes. A programmable maximum run timer will shut down the Chain Disk and the Flex-Flo systems if the system runs continuously for an excessive amount of time indicating that a bin is empty or a costly feed spill is occurring.

Available in two models, the APCD-500 features a 24 hour time clock and actuator outputs making it ideal for automated feeding in breeding and farrowing facilities.



•


Welded Steel Tube


AP's Flex-Flo™ flexible auger feed delivery system delivers a continuously metered flow of feed from the bin to the Chain Disk system.

PVC Tube

CHAIN DISK FEED DELIVERY

AUTOMATED PRODUCTION SYSTEMS

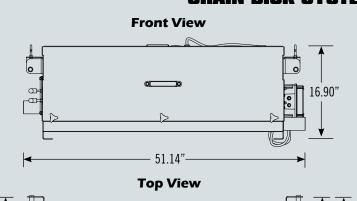

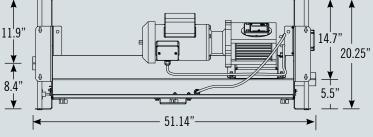

Corner Dimensions - 13.7" -П 13.7" Ó 23.0" Minimum -≻

DROPS & DROP FEEDERS

Chain Disk systems can be equipped with a wide variety of AP's volumetric sow feeders and outlet drops including a pneumatic actuated unit for fully automated multiration feeding. Consider AP's Chain Disk for your next feed delivery system.



Econo-Drop Feeder





Accu-Drop Feeder



Kwik Attach **Outlet Drop**



Rope Controlled Outlet Drop



Farrowing Drop Feeder

See your local AP representative for more information on AP's full line of feeding equipment.

Your Source for Innovative Solutions.





AUTOMATED PRODUCTION SYSTEMS

1004 E. Illinois St. Assumption, IL 62510 USA 217-226-4449 Fax 217-226-3540 Int'l Tel 217-226-4401 Tech Support 712-239-1011



For more information on AP's many products and services, contact your local AP representative or visit us online at:

CHAIN DISK SYSTEM DIMENSIONS